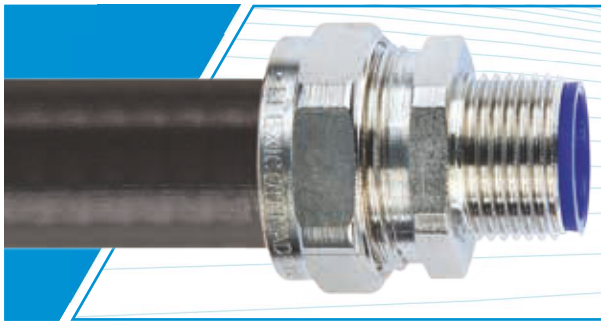

Liquid Tight Conduit fittings
nickel plated brass fittings

IP66 IP67 IP68 IP69

Fittings

C	C-S	C-F NEW	C-SF NEW
external thread nickel plated brass Multipart compression fitting including elastomeric seal. Can be used for knockout or threaded entries as fitting rotates until tightened.	**swivel external thread nickel plated brass** Compression fitting for knockout or threaded entries. Multipart compression fitting including elastomeric seal. The external thread swivels about the main body even after tightening.	**internal thread nickel plated brass** Multi part compression fitting including elastomeric seal to connect with an external thread.	**swivel internal thread nickel plated brass** Multi part compression fitting including elastomeric seal. Swivel internal thread makes it suitable for connection to male threads. Internal thread swivels about the main body even after tightening.
IP66 IP67 IP68 IP69	IP66 IP67 IP68 IP69	IP66 IP67 IP68 IP69	IP66 IP67 IP68 IP69



#







nominal size (mm)	US trade size (")	outside dia (mm)	inside dia (mm)	metric thread part number	for PG thread size	for NPT thread size	metric thread part number	metric thread part number	metric thread part number
10	¼	11.8	7.0	LTP10-M12-C	PG7				
10				LTP10-M16-C					
12	⅜	14.2	10.0	LTP12-M16-C	PG9		LTP12-M16-S		
16	⅜	17.8	12.6	LTP16-M16-C	PG11	050 (½")	LTP16-M16-S		
16				LTP16-M20-C	PG13	050 (½")	LTP16-M20-S		LTP16-M20-SF
20	½	21.1	16.0	LTP20-M20-C	PG16	050 (½")	LTP20-M20-S	LTP20-M20-F	LTP20-M20-SF
25	¾	26.4	21.0	LTP25-M25-C	PG21	075 (¾")	LTP25-M25-S	LTP25-M25-F	LTP25-M25-SF
32	1	33.1	26.5	LTP32-M32-C	PG29	100 (1")	LTP32-M32-S	LTP32-M32-F	
40	1¼	41.8	35.4	LTP40-M40-C	PG36	125 (1¼")	LTP40-M40-S	LTP40-M40-F	
50	1½	47.9	40.4	LTP50-M50-C	PG42	150 (1½")	LTP50-M50-S	LTP50-M50-F	
63	2	59.7	51.6	LTP63-M63-C	PG48	200 (2")			

When ordering PG or NPT please see below.

Ordering Notes

- Add reel length eg: LTP20B-25M for a 25m reel
- For LTP specify colour (B = Black, G = Grey)

* Indicates parts made to order on request and may be subject to MOQ and lead time

\+ Double interlock section

- **Available on request:**
  - longer lengths and bulk packaging
  - cut lengths and assemblies
  - C-S with PG threads
  - other colours
  - internal thread fittings

How to read the fittings code

Note: For PG or NPT thread types please insert thread size listed to obtain part number

LTP10-M12-C

- conduit
- thread size
- fitting type

i.e LTP16-PG13-C
or
LTP16-050-C