

## RIGID METAL CONDUIT ACCESSORIES - 1

### PRODUCT TYPE

COUPLING (FEMALE TO FEMALE)

### PRODUCT CODE

MD-..

### MANUFACTURER


MSM

### MATERIAL

GALVANIZED STEEL

### COATING

ELECTRO GALVANIZED / Optional HOT DIP GALVANIZED

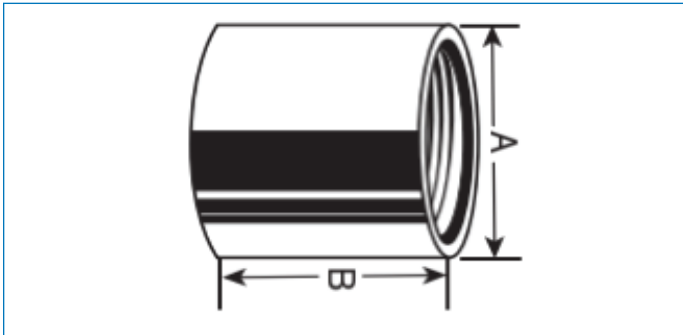

### CERTIFICATES



Gas Code	Gas Size	DIN MM	A mm	B mm	ASTM A- 865 Code	Gas Size	DIN MM	A mm	B mm
MD-G1	1/2"	15	26,6	34	MD-G1.A	1/2"	15	27,0	38,1
MD-G2	3/4"	20	31,8	36	MD-G2.A	3/4"	20	33,4	40,0
MD-G3	1"	25	39,5	43	MD-G3.A	1"	25	40,0	49,2
MD-G4	1 1/4"	32	48,3	48	MD-G4.A	1 1/4"	32	48,3	50,8
MD-G5	1 1/2"	40	54,5	48	MD-G5.A	1 1/2"	40	55,9	50,8
MD-G6	2"	50	66,3	56	MD-G6.A	2"	50	69,8	52,4
MD-G7	2 1/2"	65	82	65	MD-G7.A	2 1/2"	65	82,5	77,8
MD-G8	3"	80	95	71	MD-G8.A	3"	80	101,6	80,9
MD-G9	4"	100	121,4	83	MD-G9.A	4"	100	127,0	87,3
MD-G10	5"	125	146,3	92	MD-G10.A	5"	125	159,9	94,0
MD-G11	6"	150	173,3	92	MD-G11.A	6"	150	187,7	100,0

### Usage Areas

Used to connect threaded conduits.

Electro galvanized products are at least 8 microns, while dip galvanized coated products are at least 55 microns with a zinc heart.