

## ETANJ METAL CABLE GLANDS AND ACCESSORIES

### PRODUCT TYPE

WATERPROOF TYPE BRASS CABLE GLAND / METRIC & Pg

### PRODUCT CODE

MKR..

### MANUFACTURER


MSM

### MATERIAL

MS-58 BRASS

### COATING

NICKEL

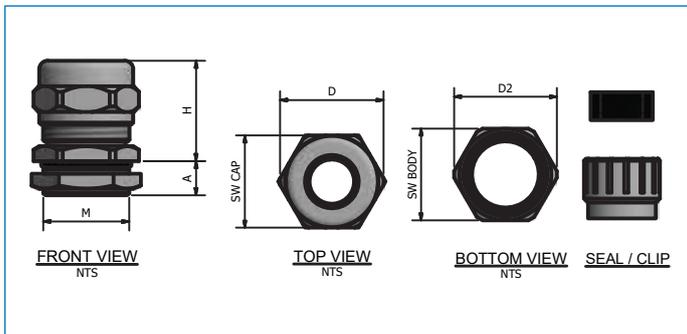

### GENERAL FEATURES:

- \* Threading norms; Metric EN 60423  
NPT ANSI B1.20.1  
GAS ISO 228  
Pg DIN 46320
- \* IP Protection class: IP 66 & IP 68
- \* Standard Chloroprene Gaskets -40°C to +100°C,  
Optional Silicone Gaskets -60°C to +180°C,
- \* Optional 316-316L stainless steel is also available.
- \* It is of Standard Brass (MS-58) origin and nickel plating can also be made if desired.
- \* Physical properties stated in the table have to be considered with  $\pm 5\%$  tolerance.
- \* The gasket is resistant to temperatures from -40°C to +80°C.
- \* If requested can be produced in any desired size or with a special thread length.

### Usage Areas

Especially in industrial environments, panel, motor etc. used in termination connections.



### CERTIFICATES



### OPTIONAL ACCESSORIES:

- \* PVC Shroud,
- \* Lock Nut,
- \* Earth Tag,
- \* IP Washer,
- \* S. Steel Serrated Washer

## ETANJ METAL CABLE GLANDS AND ACCESSORIES

### PRODUCT TYPE

WATERPROOF TYPE BRASS CABLE GLAND / METRIC & Pg

### PRODUCT CODE

MKR..

### MANUFACTURER

MSM

### MATERIAL

MS-58 BRASS

### COATING

NICKEL



MSM Code	Metric Size	Cable Diameter min-max (mm)	Ø M (mm)	A (mm)	H (mm)	SW Cap (mm)	SW Cap D (mm)	SW Body (mm)
MKR-M1	M12x1,5	4,0 - 8,0	12x1,5	6,0	21,0	18	20,0	17
MKR-M2	M16x1,5	4,0 - 8,0	16x1,5	7,0	21,0	18	20,0	17
MKR-M3	M20x1,5	6,0 - 12,0	20x1,5	8,0	23,0	22	24,5	22
MKR-M4	M25x1,5	10,0 - 14,0	25x1,5	8,0	31,0	30	33,5	30
MKR-M5	M32x1,5	13,0 - 18,0	32x1,5	9,0	35,0	40	41,5	38
MKR-M6	M40x1,5	18,0 - 25,0	40x1,5	9,0	42,5	50	55,0	50
MKR-M7	M50x1,5	22,0 - 32,0	50x1,5	9,0	44,0	60	61,0	55
MKR-M8	M63x1,5	34,0 - 44,0	63x1,5	14,0	50,0	65	71,0	65
MKR-M9	M75x1,5	48,0 - 61,0	75x1,5	15,0	51,0	85	92,0	80
MKR-M10	M80x1,5	66,0 - 72,0	80x1,5	16,0	52,0	95	102,0	90
MKR-M11	M90x2,0	59,0 - 71,0	90x2,0	22,0	58,0	95	102,0	95

MSM Kod	Pg Size	Cable Diameter min-max (mm)	Ø M (mm)	A (mm)	H (mm)	SW Cap (mm)	SW Cap D (mm)	SW Body (mm)
MKR-P1	Pg 7	3,0 - 6,0	12,50	6,0	21,0	18	20,0	16
MKR-P2	Pg 9	4,0 - 8,0	15,20	7,0	21,0	18	20,0	17
MKR-P3	Pg 11	5,0 - 10,0	18,60	6,0	22,0	20	22,5	19
MKR-P4	Pg 13,5	6,0 - 12,0	20,40	7,0	23,0	22	24,5	22
MKR-P5	Pg 16	10,0 - 14,0	22,50	6,5	31,0	24	26,5	23
MKR-P6	Pg 21	13,0 - 18,0	28,30	7,0	35,0	30	33,5	30
MKR-P7	Pg 29	18,0 - 25,0	37,00	8,0	42,5	40	44,5	38
MKR-P8	Pg 36	22,0 - 32,0	47,00	9,0	44,0	50	55,0	50
MKR-P9	Pg 42	30,0 - 38,0	54,00	12,0	50,0	60	66,0	55
MKR-P10	Pg 48	34,0 - 44,0	59,30	14,0	51,0	65	71,0	65