

EMT TYPE THREADLESS STEEL CONDUITS / HOT DIP GALVANIZED COATING

PRODUCT TYPE

EMT GALVANIZED THREADLESS STEEL CONDUITS / STANDARD TYPE

PRODUCT CODE

EMT-101.H

MANUFACTURER


I.T.C.C.

MATERIAL

GALVANIZED STEEL

COATING

HOT-DIP GALVANIZED

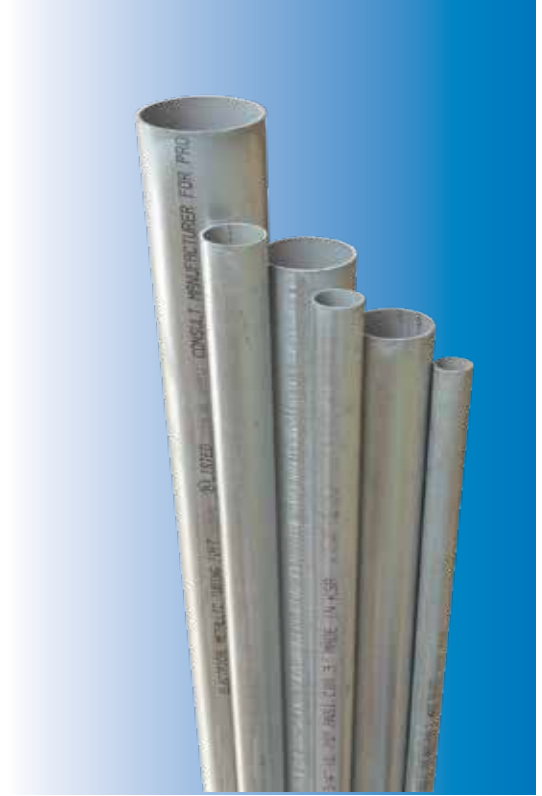

GENERAL FEATURES:

- * Certified by UL 797 and ANSI C80.3, GOST-R, EAC, CE.
- * Burr-free electrical installation conduits.
- * Standard product length 3.05 m.
- * Hot-dip galvanized coating and bendable.
- * $\pm 5\%$ tolerance of all below-mentioned physical characteristics

CERTIFICATES



MSM Code	Manufacturer's Code	Size	Nominal Diameter (ID x OD, mm)	Nominal Wall Thickness (mm)	Weight (m/kg)	Quantity per Bundle (pcs)
EMT-101.H	C-E00050	1/2"	15,79 x 17,93	1,07	0,45	10
EMT-102.H	C-E00075	3/4"	20,94 x 23,42	1,24	0,69	10
EMT-103.H	C-E00100	1"	26,64 x 29,54	1,45	1,00	10
EMT-104.H	C-E00125	1 1/4"	35,05 x 38,35	1,65	1,50	5
EMT-105.H	C-E00150	1 1/2"	40,90 x 44,20	1,65	1,72	5
EMT-106.H	C-E00200	2"	52,50 x 55,80	1,65	2,20	3
EMT-107.H	C-E00250	2 1/2"	69,37 x 73,03	1,83	3,21	3
EMT-108.H	C-E00300	3"	85,24 x 88,90	1,83	3,91	2
EMT-109.H	C-E00400	4"	110,08 x 114,30	2,11	5,85	2

Usage Areas

Especially used in construction of social, industrial buildings, ships etc. suitable for outdoor use and wet conditions.

With the special bending apparatus, turns can be made at desired degrees.