

RSC TYPE THREADED GALVANIZED STEEL CONDUIT ACCESSORIES

PRODUCT TYPE

45° - THREADED ELBOW

PRODUCT CODE

MR-551.H

MANUFACTURER


PRO-STAR

MATERIAL

GALVANIZED STEEL

COATING

HOT-DIP GALVANIZED

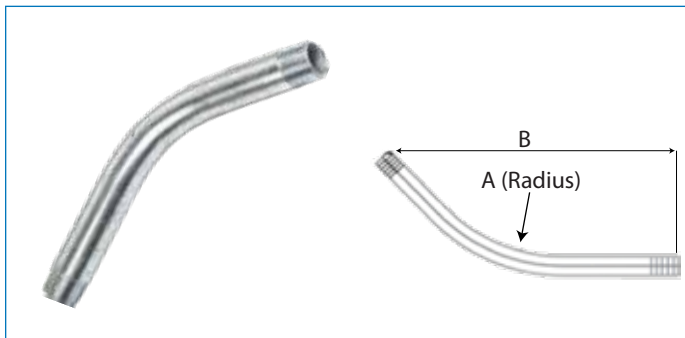

CERTIFICATES



MSM Code	Manufacturer's Code	Thread Size	Outer Dia. (mm)	Wall thickness (mm)	A Radius (mm)	B Length (mm)	T Tangent (mm)	Package Weight (kg)
MR-551.H	8356	1/2"	21,34	2,64	101,60	161,11	50	17,5
MR-552.H	8357	3/4"	26,67	2,72	114,30	172,24	50	25,0
MR-553.H	8358	1"	33,40	3,20	146,05	226,09	25	22,5
MR-554.H	8359	1 1/4"	42,16	3,38	184,15	260,35	20	29,0
MR-555.H	8360	1 1/2"	48,26	3,51	209,55	303,20	15	29,3
MR-556.H	8361	2"	60,33	3,71	241,30	356,39	10	30,0
MR-557.H	8362	2 1/2"	73,03	4,90	266,70	406,40	4	22,0
MR-558.H	8363	3"	88,90	5,21	330,20	481,25	2	17,3
MR-559.H	8365	4"	114,30	5,72	406,40	595,30	1	15,0
MR-560.H	8366	5"	141,30	6,20	-	-	1	23,5
MR-560.1.H	8367	6"	168,26	6,75	-	-	1	38,0

Usage Areas

Used for 45° turns in RSC conduits.